

# Vibration Butt Joint with Flash Traps

Customer Name: \_\_\_\_\_ Date: \_\_\_\_\_



Application Number: \_\_\_\_\_ Revision: \_\_\_\_\_

Project: \_\_\_\_\_

Material: \_\_\_\_\_

Prepared By: \_\_\_\_\_ Email: \_\_\_\_\_

	Dimension	General Guidelines	Recommended Size
A	Butt Joint Width	~ 0.160" (4 mm)	
B	Butt Joint Height	~ 0.060" (1.5 mm)	
C	Cosmetic Gap Height	~ 0.040" (1.0 mm)	
D	Groove Depth	2B	
E	Side Wall Taper	15°	°
H	Side Wall Height	0.080" (2 mm)	
M	Melt Down	0.060" (1.5 mm)	
S	Side Wall Width	0.060" (1.5 mm)	
T	Tongue Width	A + 0.080" (2 mm)	
W	Wall Thickness	0.120" (3 mm)	

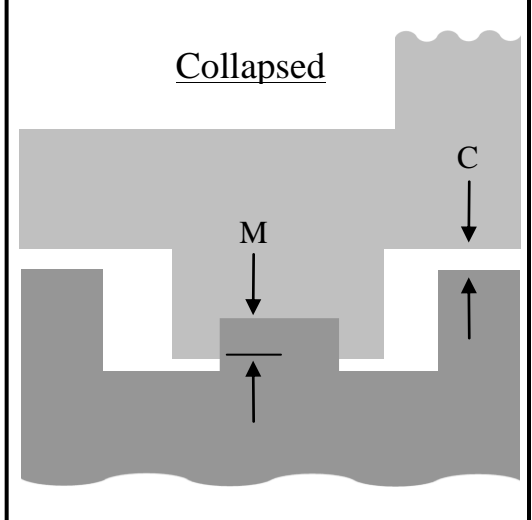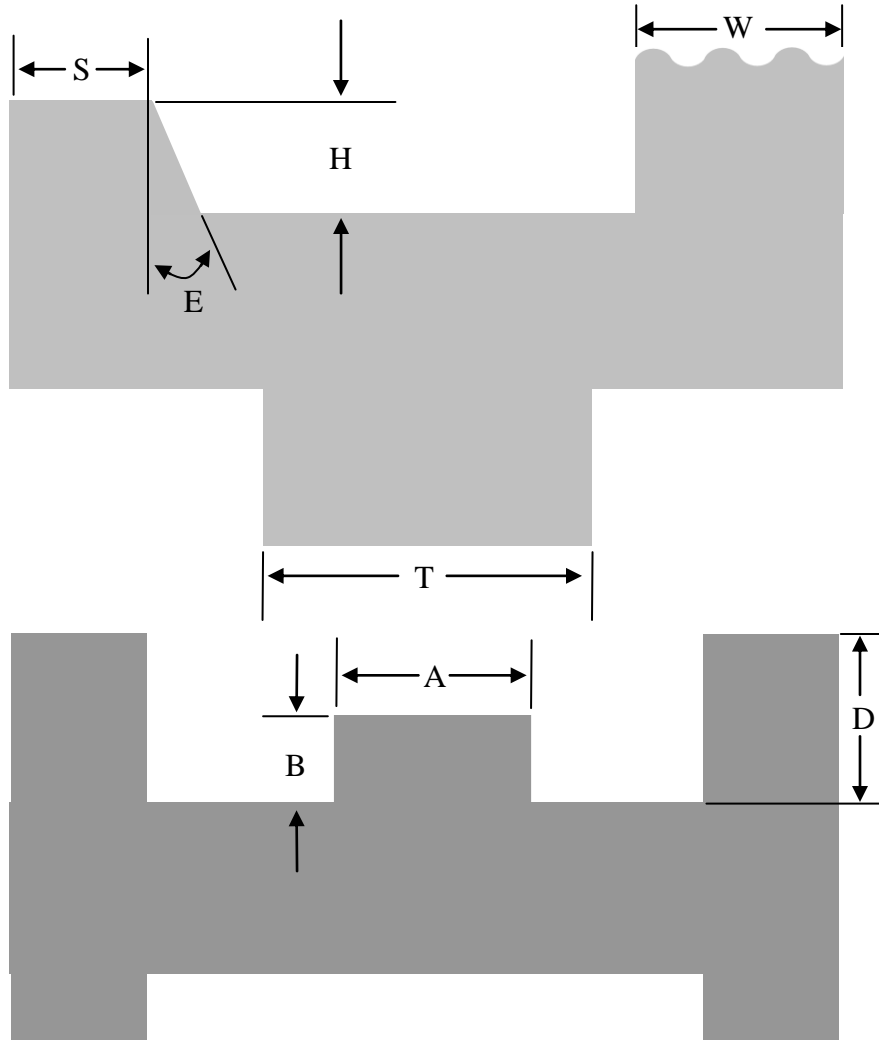

## Dukane Corporation

*Intelligent Assembly Solutions*

2900 Dukane Drive  
St. Charles, IL 60174  
(630) 797-4900

<http://www.dukane.com/us>  
[us\\_caddata@dukane.com](mailto:us_caddata@dukane.com)